



- indicates stocked size
- indique la dimension stockée
- am Lager geführte Größe


Acier Zingué

DIN7500

TAP-FIX®

Thread Rolling Screws

FOR METAL



FORM C DIN7985		Cross Recess (z)				Pan		Zinc Plated & Lubricated	
Di. D max	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Di. D max
Di. C max	2.05	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Di. C max
d1 - max	4.00	5.00	6.00	7.00	8.00	10.00	12.00	16.00	d1 - max
k - max	1.72	2.12	2.52	2.82	3.25	3.95	4.75	6.15	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	1	2	2	2	3	4	Recess
L- Length mm									L- Length mm
4		*							4
5	*	*	*						5
6	*	*	*	*	*	*			6
7									7
8	*	*	*	*	*	*	*		8
10	*	*	*	*	*	*	*		10
12	*		*	*	*	*	*	*	12
14		*			*				14
16		*	*	*	*	*	*		16
18									18
20			*	*	*	*	*	*	20
25			*	*	*	*	*		25
30			*	*	*	*	*		30
35					*	*	*		35
40					*	*	*		40
45									45
50							*		50



indicates stocked size
 indique la dimension stockée
 am Lager geführte Größe



Acier Zingué

DIN7500

TAP-FIX®

Thread Rolling Screws

FOR METAL



FORM M DIN965		Cross Recess (z)				Countersunk		Zinc Plated & Lubricated	
Di. D max	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Di. D max
Di. C max	2.05	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Di. C max
d1 - max	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max
k - ref	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	1	2	2	2	3	4	Recess
L- Length mm									L- Length mm
4									4
5									5
6		*	*	*	*				6
7									7
8		*	*	*	*	*			8
10		*	*	*	*	*			10
12		*	*	*	*	*	*	*	12
14									14
16			*	*	*	*	*	*	16
18									18
20			*	*	*	*	*	*	20
25			*		*	*	*	*	25
30					*	*	*	*	30
35							*		35
40						*	*	*	40
45							*		45
50							*	*	50



indicates stocked size
 indique la dimension stockée
 am Lager geführte Größe


DIN7500

INOX

TAP-FIX®

Thread Rolling Screws

FOR SOFT METAL

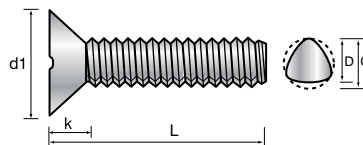

FORM M DIN965		Cross Recess (z)				Countersunk			Stainless Steel	
Dia. mm	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. mm	
Dia. C max	2.05	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max	
d1 - max	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max	
k - ref	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref	
s - A/F	-	-	-	-	-	-	-	-	s - A/F	
Recess	1	1	1	2	2	2	3	4	Recess	
L- Length mm									L- Length mm	
4									4	
5									5	
6			*						6	
7									7	
8			*		*				8	
10			*		*	*			10	
12					*	*			12	
14									14	
16					*	*	*		16	
18									18	
20			*		*	*	*		20	
25					*		*		25	
30							*		30	
35									35	
40							*		40	
45									45	
50							*		50	